

LWC

Lithium Works China


Data Sheet

CR 1616


3V Lithium Manganese Dioxide Button Cell

Dimensions(mm)	16mm x 1.6mm
Nominal Voltage	3Volt
Nominal Capacity	50mAh
(Continuous discharge at 20°C under 47KOhm load to 2.0V end voltage)	
Recommended Continuous Drain	0.1mA
Recommended Pulse Drain	8mA
Standard load	62KOhm
Standard weight	0.85 grams
Terminal materials	Stainless steel

Dimensions

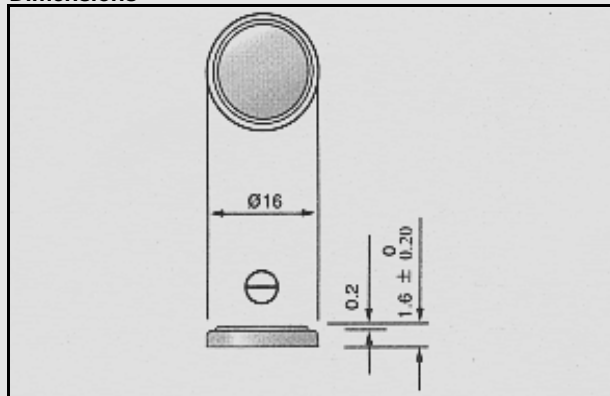

Discharge on Load

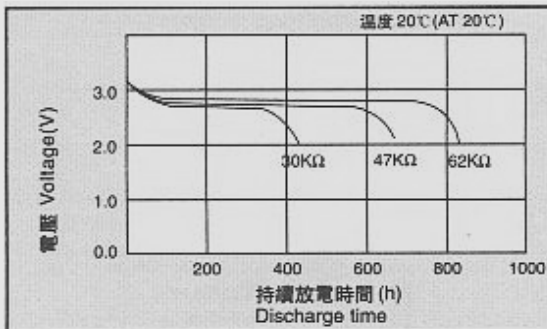

Discharge on Temperature

